

NEW PRODUCT ANNOUNCEMENT

NEW! Noritz NCC1991 Series High Efficiency Commercial Condensing Models for Indoor and Outdoor Installations

- BTU input range from 16,000 up to 199,900 BTU/h
- Maximum flow rate capacity of up to 11.1 GPM
- Part of Noritz America's line of ProTough products for both indoor (-DV) and outdoor (-OD) installations
- Heat exchanger manufactured with commercial grade copper, 25% thicker piping than standard models

Product: NCC1991 Series Commercial Condensing Water Heater
Model#: NCC1991-OD, NCC1991-DV

Availability: February 23, 2012




Tankless for Professionals™

Specifications:

Performance/Dimensions



BTU Range: 199,900 to 16,000 BTU/h
 Max. Hot Water Capacity: Up to 11.1 gpm
 Dimensions: 24.4" x 18.4" x 9.4"
 Warranty: 12 years Heat Exchanger/5 years Parts/
 1 year Approved Reasonable Labor

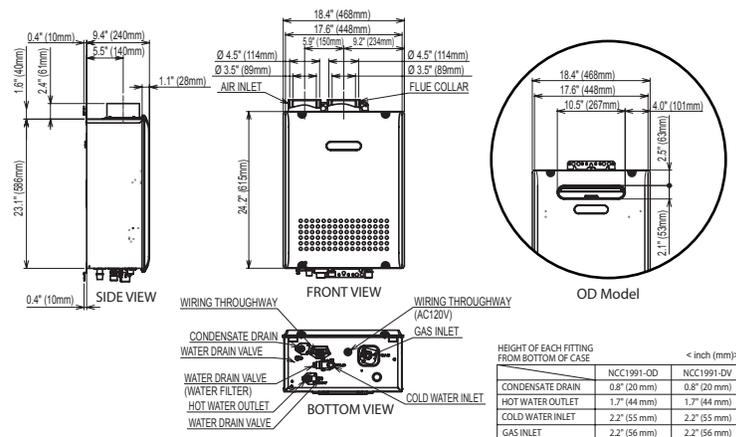

Accessories

