

NEW PRODUCT ANNOUNCEMENT

NEW! Noritz NR50-OD Compact Outdoor Model with Freeze Protection

- BTU input range:
 - LPG: 20,000 min ~ 120,000 max
 - NG: 19,000 min ~ 120,000 max
- Flow rate range: 0.5 ~ 5.0 GPM
- Compact outdoor design that does not require any venting
- Heater recommended for southern climates
- Now with Freeze Protection starting with serial no's: 2012.07-002418 for NG and 2012.07-002480 for LP

Product: NR50-OD Outdoor Water Heater
Part #: NR50-OD

Available: Today!

Tankless for Professionals™

Specifications:




Performance/Dimensions



BTU Range: 120,000 to 19,000 (NG) or 20,000(LPG) BTUH
 Max. Hot Water Capacity: Up to 5.0 gpm
 Dimensions: 20.5" x 13.8" x 6.7"
 Venting: Outdoor Vent (no vent pipe required)
 Warranty: 12 years Heat Exchanger/5 years Parts/
 1 year Approved Reasonable Labor



Please note that these new heaters are marked with the words "Freeze Protection" on the packing sticker.

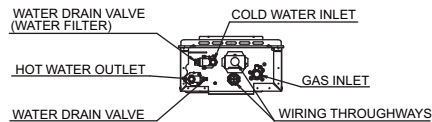

HEIGHT OF EACH FITTING FROM BOTTOM OF CASE	
	NR50-OD
HOT WATER OUTLET	1.8"
COLD WATER INLET	1.9"
GAS INLET	2.0"

Accessories (purchase separately)



Noritz Isolation Valves (#IK-WV-200)



Remote Controller (#RC-7649M)



Pipe Cover (#PC-15)



H2Flow Anti-Scale System (#H2F)