





NEW PRODUCT ANNOUNCEMENT

NEW! NRC661-DV NRC661-OD



BTU Range: 120,000 to 15,000 BTUh
 Max. Hot Water Capacity: Up to 6.6 gpm
 Dimensions: 23.6" x 13.8" x 6.7" (DV model)
 20.5" x 13.8" x 6.7" (OD model)
 Venting: DV/SV or OD
 Warranty: 12 years Heat Exchanger
 5 years Parts
 1 year Approved Reasonable Labor

- BTU Range 15,000 - 120,000 max
- Flow Rate 0.5 - 6.6 gpm
- 1/2" Gas Line Connection
- Vents in 3" PVC (DV Model Only)
- New Display Window
- Tech Data Sheet Included

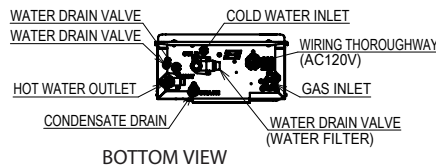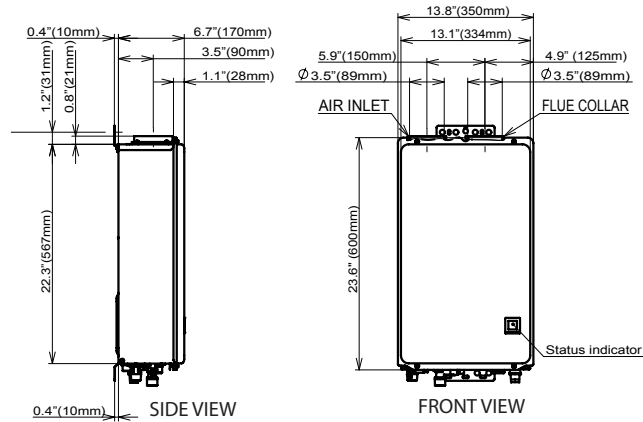

HEIGHT OF EACH FITTING FROM BOTTOM OF CASE

	NRC661-DV	NRC661-OD
CONDENSATE DRAIN	0.8" (20mm)	0.8" (20mm)
HOT WATER OUTLET	1.8" (45mm)	1.8" (45mm)
COLD WATER INLET	2.3" (58mm)	2.3" (58mm)
GAS INLET	2.0" (50mm)	2.0" (50mm)

**Available:
May 1, 2013**

ACCESSORIES:

- Isolator Valves (#IK-WV-200)
- Pipe Cover (#PC-1S)
- 3" PVC Termination (#VK3-H-PVC)
- SV Conversion Kit (#SV-CK-3)
- Recess Box (#RB-510)